


RAY-BAR LEAD BACKED FIRE RESISTANT TREATED PLYWOOD



- UTILIZED FOR STRUCTURAL SUPPORT AND SHEAR IN HEAVY LEAD SHIELDING REQUIREMENT APPLICATIONS AND FLOORING SHIELDING.
- RAY-BAR LEAD BACKED FIRE RETARDANT PLYWOOD IS AVAILABLE IN 15 LEAD SHIELDING THICKNESS VALUES FROM 1/64"–1".
- PLYWOOD IS UL TESTED FOR FLAME SPREAD RATING FOR 30 MINUTES PER ASTM E-84 FLAME SPREAD TEST.
- ICC-ESR-1791 HAS BEEN ISSUED BY THE INTERNATIONAL CODE COUNCIL, CONFIRMING COMPLIANCE WITH NATIONAL, UNIFORM AND STANDARD BUILDING CODES.
- ICC-ESR-1791 CONTAINS CONDITIONS OF USE AND STRENGTH ADJUSTMENTS FOR SHEATHING, FRAMING AND OTHER APPLICATIONS.
- MEETS THE FLAME SPREAD REQUIREMENT OF ALL BUILDING CODES WHICH IS 25 OR LESS, AS DETERMINED BY UNDERWRITERS LABORATORIES IN THE EXTENDED 30 MINUTE DURATION OF ASTM E-84, "STANDARD TEST METHOD FOR SURFACE BURNING CHARACTERISTICS OF BUILDING MATERIALS."
- PLYWOOD BEARS THE UNDERWRITERS LABORATORIES CLASSIFICATION MARK IDENTIFYING IT AS BEING PRODUCED UNDER ITS CLASSIFICATION AND FOLLOW UP SERVICES.

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

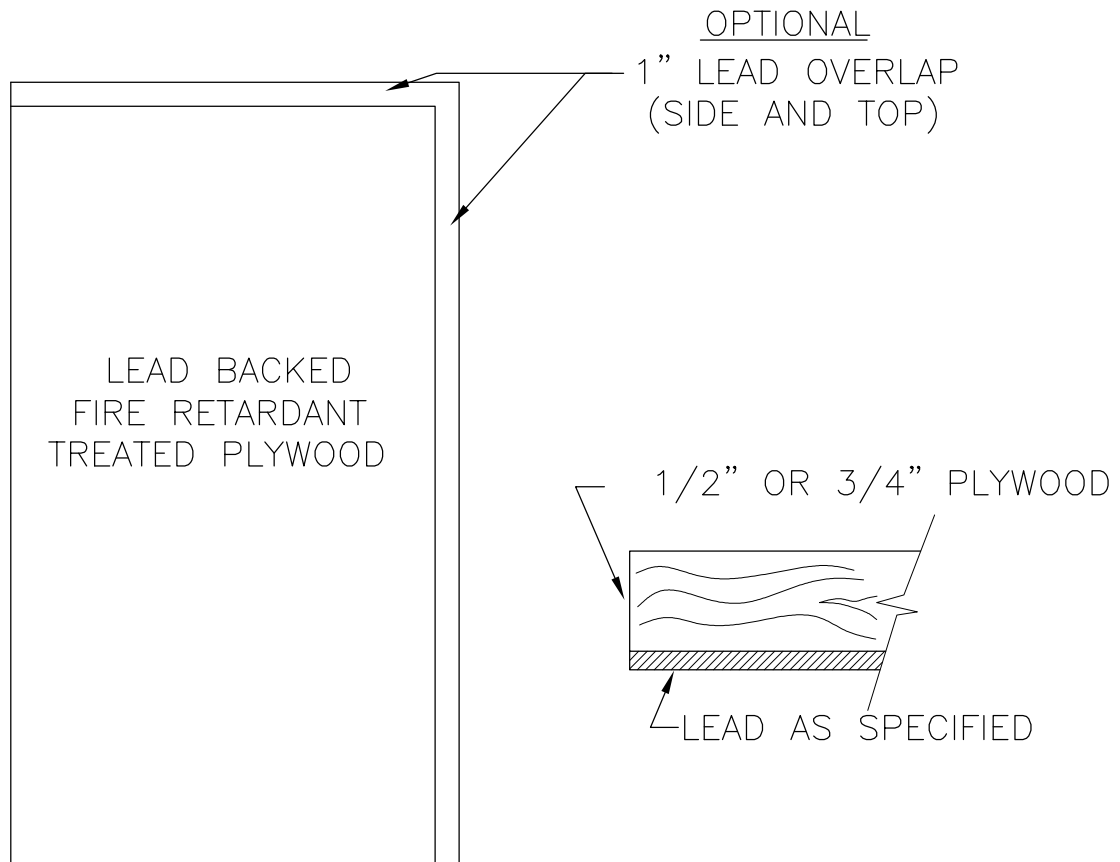

JOB NAME:
LOCATION:
ROOM NUMBER:
SHEET ____ OF ____:

RAY-BAR LEAD BACKED PLYWOOD

RAY-BAR ENGINEERING CORP.

Toll Free: 1(800) 444-XRAY / 1(800) 444-9729
Telephone: (626) 969-1818
24 Hour Fax: 1(800) 333-XRAY /
1(800) 333-9729
website: www.raybar.com

SCALE
NTS

LBFP