



RAY-BAR STATIONARY X-RAY BARRIERS (84" HIGH)

WALL MOUNTED BARRIERS


SINGLE SMALL

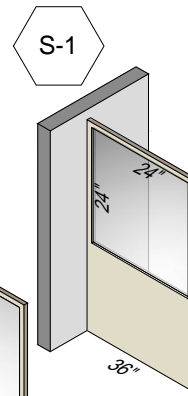


SINGLE LARGE

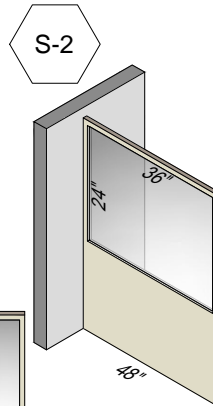


2 PIECE ANGLED 45° DEGREES

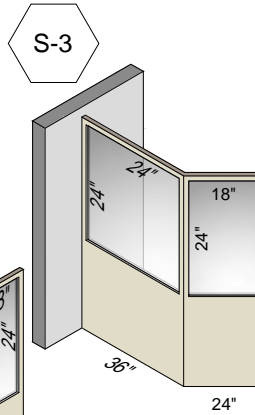


2 PIECE ANGLED 90° DEGREES

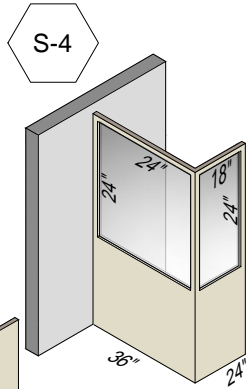


3 PIECE ANGLED

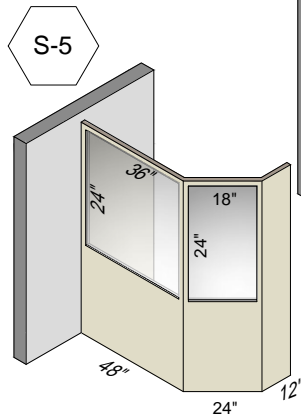


FREE STANDING BARRIERS




S-6 SINGLE SMALL



S-7 90° DEGREE 3 PIECE WRAP



S-8 45° DEGREE 3 PIECE WRAP

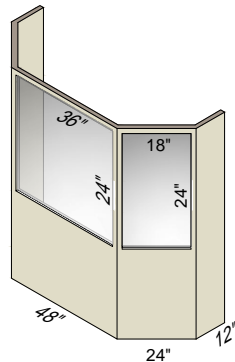

S-9 45° DEGREE 5 PIECE WRAP

NOTE:

CUSTOMER / INSTALLER MUST VERIFY LEAD SHIELDING EQUIVALENCY REQUIREMENT PRIOR TO ORDERING.

SPECIFICATIONS NOTES:

ALL RAY-BAR SHEET LEAD IS 99.9% PURE MEETING FEDERAL SPEC. QQ-L-201F GRADE C APPLICABLE NCRP REPORTS.

1. STANDARD 1/16" 1.6MM 4# LEAD SHIELDING.
2. HIGHER LEAD SHIELDING EQUIVALENCY LEVELS AVAILABLE.
3. DURABLE MODULAR WOOD OR METAL PANELS CONSTRUCTION.
4. EASY TO INSTALL SHIELDED PANELS WITH CLEAR RETRO-FIT INSTRUCTIONS.
5. AVAILABLE IN STANDARD WHITE, GREY OR WARM BEIGE. ALSO AVAILABLE: SOLID LAMINATE COLORS, PLASTIC LAMINATES OR SOLID POWDER COAT COLORS.
6. STANDARD X-RAY LEAD GLASS OR OPTIONAL IMPACT RESISTANT X-RAY SAFETY GLASS VIEW WINDOWS.
7. CUSTOM SIZES AND CONFIGURATIONS AVAILABLE.

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"



	JOB NAME:
	LOCATION:
	ROOM NUMBER:
	SHEET ____ OF ____:

STATIONARY X-RAY CONTROL BARRIERS

RAY-BAR ENGINEERING CORP.

Toll Free: 1(800) 444-XRAY / 1(800) 444-9729
 Telephone: (626) 969-1818
 24 Hour Fax: 1(800) 333-XRAY /
 1(800) 333-9729
 website: www.raybar.com

SCALE
NTS

SXB-2