
## RAY-BAR BALLISTIC PANELS (RIFLE)

UL 752 LEVEL 8 / NIJ 111

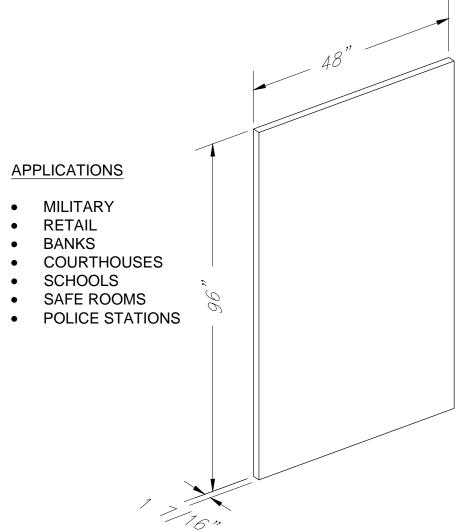

## PHYSICAL PROPERTIES

- 1 7/16" THICK
- 5 1/4" POUNDS SQ. FOOT
- FIRE RESISTANT
- FLAT RIGID PANEL

## **ADVANTAGES**

- AVAILABLE IN 1 TO 2 DAYS
- EASY TO INSTALL
- INSTALL OVER EXISTING WALLS

## PERFORMANCE STANDARDS

- UL 752 LEVEL 8 (RIFLE)
- NIJ 111 (RIFLE)
- RESISTANT RIFLE UP TO 7.62X51/308 WIN
- 5 SHOTS IN 12"X12" ARA
- 1 HOUR FIRE RESISTANT ASTM E119
- RESISTANT TO FORCED ENTRY

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

JOB NAME:
LOCATION:
ROOM NUMBER:
SHEET OF:
BALLISTIC PANEL (RIFLE)

RAY-BAR ENGINEERING (	CORP.	
-----------------------	-------	--

Toll Free: 1(800) 444-XRAY / 1(800) 444-9729

Telephone: (626) 969-1818 24 Hour Fax: 1(800) 333-XRAY /

1(800) 333-9729

website: www.raybar.com

SCALE NTS

BRP-8