


RAY-BAR BALLISTIC RESISTANT GLAZING (RIFLE) UL8

**MEETS UL 752 LEVEL 8 BULLET RESISTANCE, NO SPALL
RESISTS 7.62 X 51 / 308 WIN, NO SPALL ON ASSET SIDE
ALSO MEETS NIJ 0108.01 LEVEL 3**

PRODUCT DESCRIPTION: 2-1/4" MULTI-LAMINATED GLASS/POLYCARBONATE

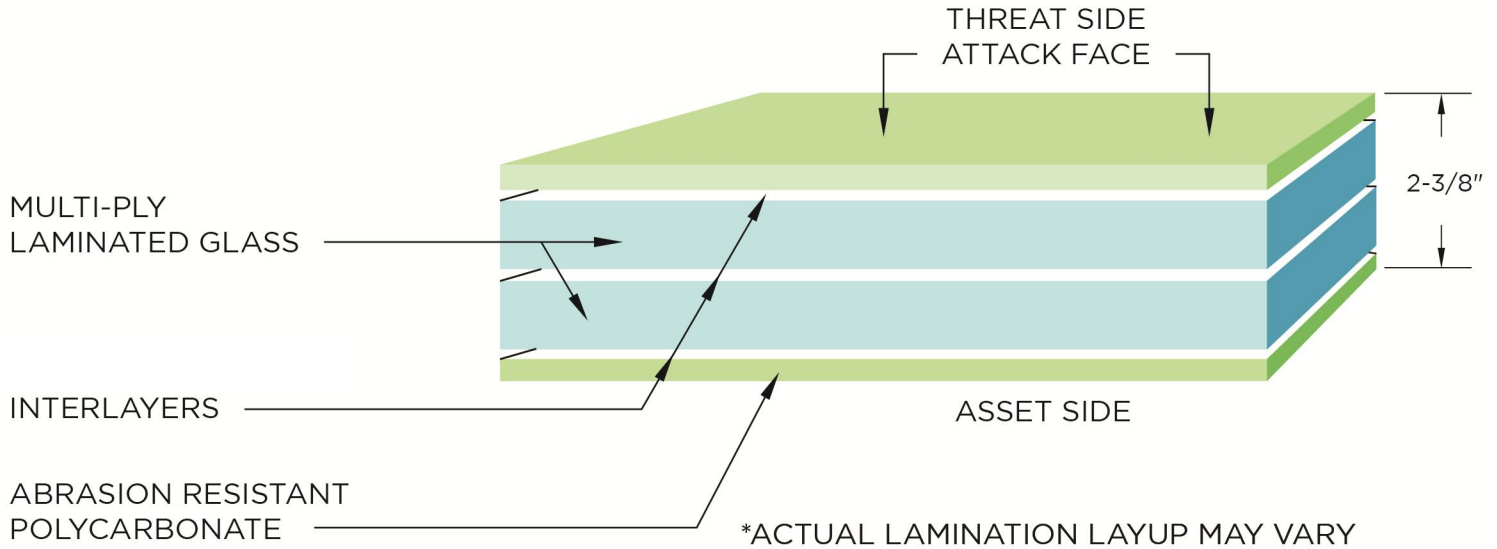

PROPRIETARY INFORMATION NOT FOR PUBLIC DISTRIBUTION

TECHNICAL DATA:

THICKNESS	TOLERANCE	WEIGHT LBS/SQ FT	DIMENSIONAL TOLERANCE	SIZE RESTRICTIONS		VISIBLE LIGHT TRANSMITTANCE
	NOMINAL			THICKNESS	MINIMUM	
2-1/4"	±0.10"	27	± 1/8"	12" X 12"	60" X 96"	57%

- UL 752 LEVEL 8
- CPSC 16 CFR 1201 CAT 2
- NIJ 0108.01 LEVEL 3
- ASTM 1349-96
- ASTM 1036-97
- ASTM 1036-1
- ANSI 297.1
- AVAILABLE IN CLEAR LOW IRON GLASS

Terms of Use: Certain designs and concepts are the exclusive proprietary property and work product of Ray-Bar Engineering provided in good faith as a courtesy for the architectural design of projects specifying, incorporating and utilizing genuine Ray-Bar products and assemblies. Ray-Bar designs are not to be copied, altered, plagiarized or utilized in any competitive or detrimental manner against Ray-Bar as protected by law and/or copyrights. "All Rights Reserved"

	PROPRIETARY DESIGN
	JOB NAME :
	LOCATION :
	ROOM NUMBER :
	SHEET ____ OF ____ :
RAY-BAR BALLISTIC RESISTANT GLASS UL8	

RAY-BAR ENGINEERING CORP.		SCALE NTS RB-BRG8
Toll Free :1(800) 444-XRAY / 1(800) 444-9729		
Telephone: (626) 969-1818		
24 Hour Fax: 1(800) 333-XRAY / 1(800) 333-9729		
website: www.raybar.com		