

RAY-BAR ENGINEERING CORPORATION


LEAD LINED SHIELDED ACCESS DOOR PANELS

DW Series

**STANDARD
LEAD SHIELDING
1/16" / 4# / 1.6mm**

*** HIGHER LEVELS
AVAILABLE UPON
REQUEST**

***CUSTOMER MUST
CONFIRM
SHIELDING PRIOR
TO ORDERING**

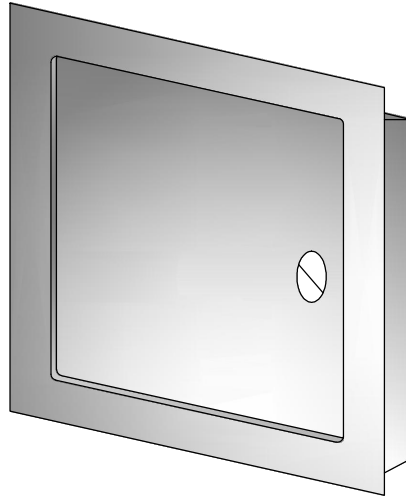

STANDARD

**12" X 12"
18" X 18"
24" X 24"**

**GOOD IN STOCK
AVAILABLE
IN ONLY 3 DAYS**

RAY-BAR ENGINEERING LEAD LINED SHIELDED DRYWALL ACCESS DOORS

*** IT IS CUSTOMER'S RESPONSIBILITY
TO VERIFY LEAD SHIELDING
REQUIREMENTS PRIOR TO ORDERING**

Doors are ideally suited for new installations or retrofit into existing lead lined walls or ceilings. Door features rounded safety corners.

Door and Frame are fabricated from 16 or 14 gauge, galvanized steel with a prime coat finish .

Frame is one piece construction, 1" wide and provides perfect concealment of the rough wall opening. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and fixing maximum clearance.

Concealed Pivoting Rod Hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge.

Latch is screwdriver operated (key lock optional).

Finish is a prime coat suitable for painting.

Guide Specification

Provide Ray-Bar DW series, Drywall Access Doors (Specify model number and option). Access door and frame shall be fabricated from 16 or 14 gauge, galvanized steel with a prime coat finish. The door shall have rounded safety corners and concealed pivoting rod hinge. Frame shall be one piece construction with no miters or welds on the face. Latch shall be screwdriver operated. Finish shall be a prime coat suitable for painting.

OTHER OPTIONS:

**FINISH: STAINLESS STEEL
LATCH: KEYED LOCK
FIRE RATED: 90 MINUTE "B" LABEL,
ANSI-UL 10B STANDARD**

RAY-BAR ENGINEERING CORPORATION

PHONE (800) 444-XRAY

E-MAIL: SALES@RAYBAR.COM

WWW.RAYBAR.COM



" WHEN PROTECTION IS REQUIRED, THERE IS NO SUBSTITUTE FOR SKILL AND EXPERIENCE"